





MOTORIZED SOLUTIONS PTY LTD

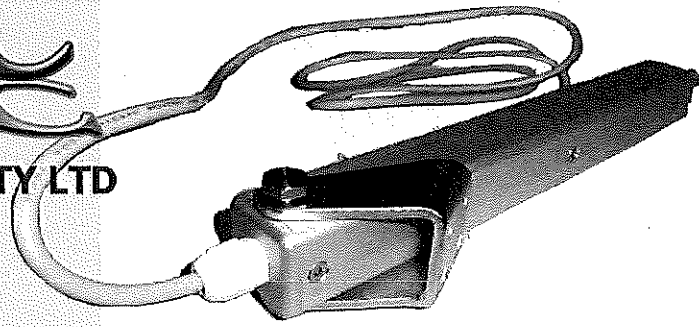

AT-019 Electric Square Spindle Actuator

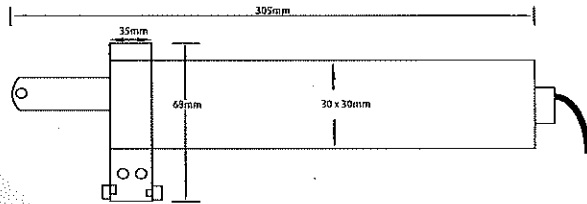

Specifications

Open method	Top hung/button hung opening/Skylight
Stroke	50 - 1000mm
Speed	10mm/sec
Push and pull force	400N/600N/900N
Max Current Absorption	1.0A/1.2A/1.4A
Voltage supply	24VDC or 240VAC, overload protection, connect with control panel
Working Temperature	-15 to +75 degrees C
Colour	Silver (or customised if required for large order)
Dimensions	30mm x 274mm x 30mm
Protection class	IP65
Feature of product	Easy Installation & maintenance, High IP rating, low noise level
Testing report	Passed endurance tests of 10,000 cycles. Passed CE Passed supervision and test centre for fire electronic products quality for resistance to 300 degree in 30 minutes testing Passed the CAL torque testing
Lock force in static motion	6,000N
Quantity system	ISO 9001
Material	Aluminium alloy
Accessories	Sill bracket, fixed bracket or wing bracket

SYDNEY OFFICE: Phone: 02 42 949 722
Email: sales@acdcms.com.au

QUEENSLAND OFFICE: Phone: 07 3287 5422
Email: qldsales@acdcms.com.au